City of Carroll

112 E. 5th Street Carroll, Iowa 51401-2799 (712) 792-1000 FAX: (712) 792-0139

MEMO TO: Mike Pogge-Weaver, City Manager MJPW

FROM: Randall M. Krauel, Director of Public Works RMK

DATE: February 20, 2019

SUBJECT: Street Resurfacing – 2019

- Public Hearing on Plans, Specifications, Form of Contract and Estimated Cost
- Resolution Adopting Plans, Specifications, Form of Contract and Estimated Cost

On February 15, 2019, plans, specifications, form of contract and estimated cost for the Street Resurfacing – 2019 project were filed by JEO Consulting Group, Inc. The plans, specifications, form of contract and estimated cost are generally described as follows:

PLANS

The plans detail the construction of full-depth patching, curb replacement, driveway replacement, pedestrian curb ramps, minor storm sewer improvements, pavement milling/scarification, hot mix asphalt resurfacing and seeding, mulching and fertilizing on the following street segments:

Street	From	To
Bluff Street	Main Street	Walnut Street
West Street	First Street	Third Street
East Street	First Street	Second Street
East Street	Seventh Street	Tenth Street
Crawford Street	Bluff Street	Third Street
First Street	Main Street	Grant Road
Water Pumping Station Parking Lot		

SPECIFICATIONS

The specifications further detail the construction of the planned improvements. Specifications are the Statewide Urban Specifications plus Supplemental Specifications.

FORM OF CONTRACT

The form of contract is the Statewide Urban Design and Specification sample form.

1869 Carroll 2019 150 YEARS

ESTIMATED COST

The estimated construction cost of the project is $1,252,754.00.

Based on the current construction cost estimate, the project cost estimate is as follows:

Design	$ 88,100.00
Construction Services	Hourly
Bond Issuance	$ 24,000.00
Construction	$1,252,754.00
Total	$1,364,854.00 + Hourly

The proposed Budget includes the following anticipated funding for the project.

Bond, F.Y. 19-20	$ 941,790.00
RUTF, F.Y. 18-19 (Streets – 18)	$ 100,000.00
RUTF, F.Y. 19-20	$ 100,000.00
SWU, F.Y. 18-19 (Streets – 18)	$ 100,000.00
SWU, F.Y. 19-20	$ 100,000.00
WUF HSPS (Streets – 18)	$ 40,000.00
WUF Watermain	$ 40,000.00
General Fund	$ 84,000.00
Total	$1,505,790.00

The project schedule is anticipated as follows:

Bid Receipt	March 14, 2019
Bid/Contract Award	March 26, 2019
Construction Completion	September 30, 2019

RECOMMENDATION: Mayor and City Council consideration, conduction of the required public hearing and passage and approval of the Resolution adopting the plans, specifications, form of contract and estimated cost for the Street Resurfacing – 2019 project.

RMK:ds

attachments (2)

RESOLUTION NO. _____

RESOLUTION ADOPTING THE PLANS, SPECIFICATIONS, FORM OF CONTRACT AND ESTIMATED COST FOR THE STREET RESURFACING – 2019 PROJECT.

WHEREAS, plans, specifications, form of contract and estimated cost were filed for the construction of public improvements described in general as Street Resurfacing – 2019; and,

WHEREAS, a public hearing on the plans, specifications, form of contract and estimated cost for said public improvements was conducted by the City Council of the City of Carroll, Iowa; and,

WHEREAS, the City Council has determined that the plans, specifications, form of contract and estimated cost are in the best interests of the City and residents thereof.

NOW, THEREFORE, BE IT RESOLVED by the City Council of the City of Carroll, Iowa, that said plans, specifications, form of contract and estimated cost are hereby adopted as the plans, specifications, form of contract and estimated cost for the Street Resurfacing – 2019 project

Passed and approved by the Carroll City Council this 25th day of February, 2019.

CITY COUNCIL OF THE
CITY OF CARROLL, IOWA

By: _____
Eric P. Jensen, Mayor

ATTEST:

By: _____
Laura A. Schaefer, City Clerk

STREET RESURFACING
2019
CARROLL, IOWA

CITY OF CARROLL, IOWA

STREET RESURFACING - 2019

PROJECT NUMBER: 160466.00

LETTING DATE: MARCH 14, 2019

JEO CONSULTING GROUP INC
800.723.5567
724 SIMON AVE
CARROLL, IA 51401

INDEX OF SHEETS

NO.	DESCRIPTION
A.01	COVER SHEET
A.02	STANDARD SYMBOLS & INFORMATION
A.03-A.08	EXISTING SITE PLANS
B.01-B.03	TYPICAL SECTIONS
C.01	ESTIMATE OF PROJECT QUANTITES & ESTIMATE REFERENCE INFORMATION
C.02	GENERAL NOTES
D.01-D.18	PLAN & PROFILE SHEETS
G.01-G.03	PROJECT CONTROL SHEETS
L.01-L.08	JOINTING AND GEOMETRIC SHEETS
M.01-M.04	STORM SEWER PLAN AND PROFILE SHEETS
R.01-R.10	REMOVAL PLAN
S.01-S.29	SIDEWALK SHEETS
U.01-U.02	DETAIL SHEETS
87	TOTAL NUMBER OF SHEETS

SUDAS STANDARD SPECIFICATIONS 2019 EDITION

THE FOLLOWING FIGURES SHALL BE CONSIDERED APPLICABLE TO CONSTRUCTION WORK ON THIS PROJECT.

NUMBER	DATE	NUMBER	DATE	NUMBER	DATE
3010.101	04-17-18	6010.601	04-21-15	7030.207	10-16-12
3010.102	04-16-19	6010.602	04-21-15	7030.208	10-16-12
4020.211	04-17-18	6010.603	04-17-18	7030.209	10-16-12
6010.303	04-17-18	6010.604	04-17-18	7030.210	10-16-12
6010.306	04-21-15	7010.101	04-16-19	7040.101	10-17-17
6010.501	04-17-18	7010.102	10-18-16	7040.102	10-17-17
6010.502	04-17-18	7030.101	10-20-15	8030.117	10-17-17
6010.503	04-17-18	7030.204	10-20-15		

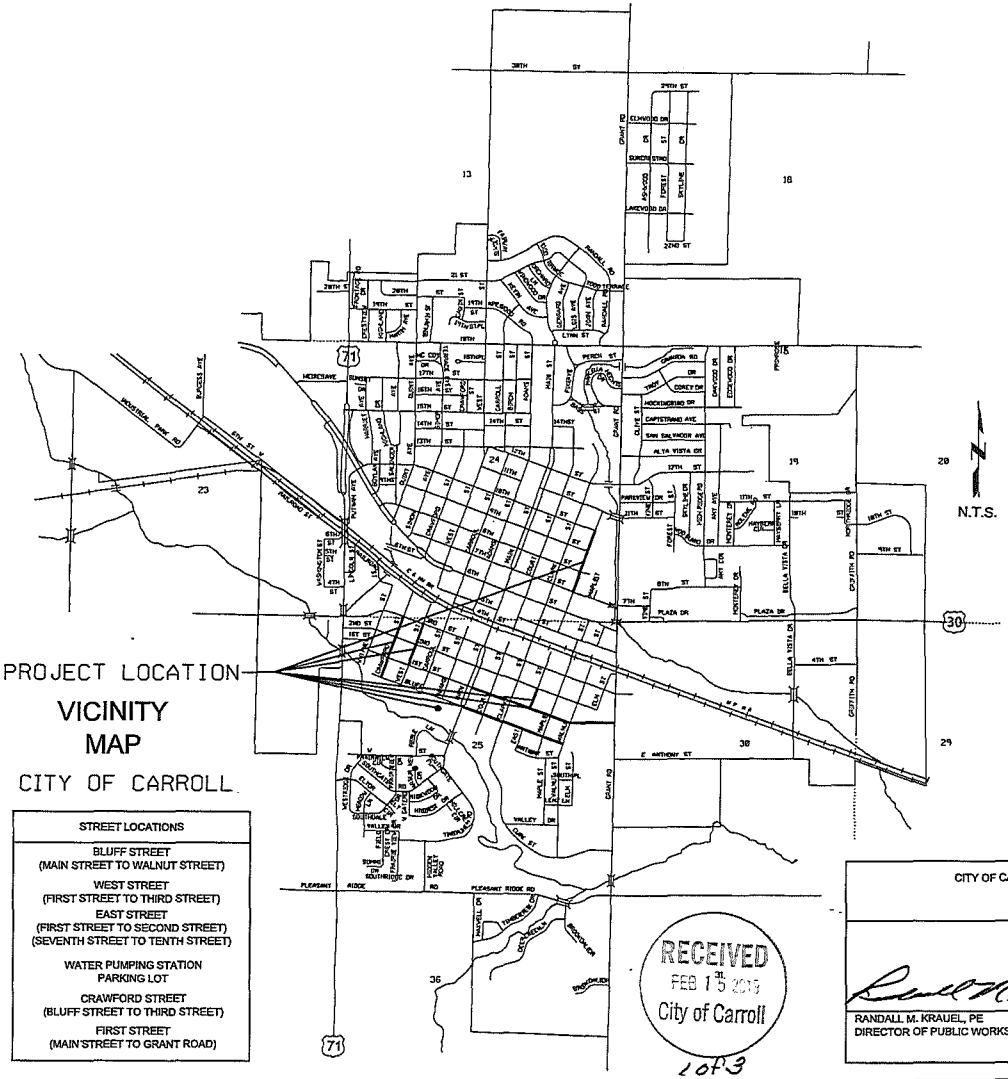

STREET LOCATIONS
BLUFF STREET (MAIN STREET TO WALNUT STREET)
WEST STREET (FIRST STREET TO THIRD STREET)
EAST STREET (FIRST STREET TO SECOND STREET) (SEVENTH STREET TO TENTH STREET)
WATER PUMPING STATION PARKING LOT
CRAWFORD STREET (BLUFF STREET TO THIRD STREET)
FIRST STREET (MAIN STREET TO GRANT ROAD)

RECEIVED
FEB 15 2019
City of Carroll

1 of 3

THE SUDAS STANDARD SPECIFICATIONS, 2019 EDITION, PLUS CURRENT AMENDMENTS AND CITY OF CARROLL SUPPLEMENTAL SPECIFICATIONS SHALL APPLY TO CONSTRUCTION WORK ON THIS PROJECT.

CITY OF CARROLL, IOWA ENGINEER REVIEWED

Randall M. Krauel 02-12-19

RANDALL M. KRAUEL, PE — DATE
DIRECTOR OF PUBLIC WORKS

LICENSED PROFESSIONAL ENGINEER — CODY F. FORCH 22843 — IOWA

I HEREBY CERTIFY THAT THIS ENGINEERING DOCUMENT WAS PREPARED BY ME OR UNDER MY DIRECT PERSONAL SUPERVISION AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF IOWA

Cody Forch — 2/12/19
SIGNATURE — DATE

CODY F. FORCH, PE
PRINTED OR TYPED NAME

22843

MY LICENSE RENEWAL DATE IS: DECEMBER 31, 2020

PAGES OR SHEETS COVERED BY THIS SEAL:
A.01-A.08; B.01-B.03; C.01-C.02; D.01-D.18; G.01-G.03; L.01-L.08; M.01-M.04; R.01-R.10; S.01-S.29; U.01-U.02